


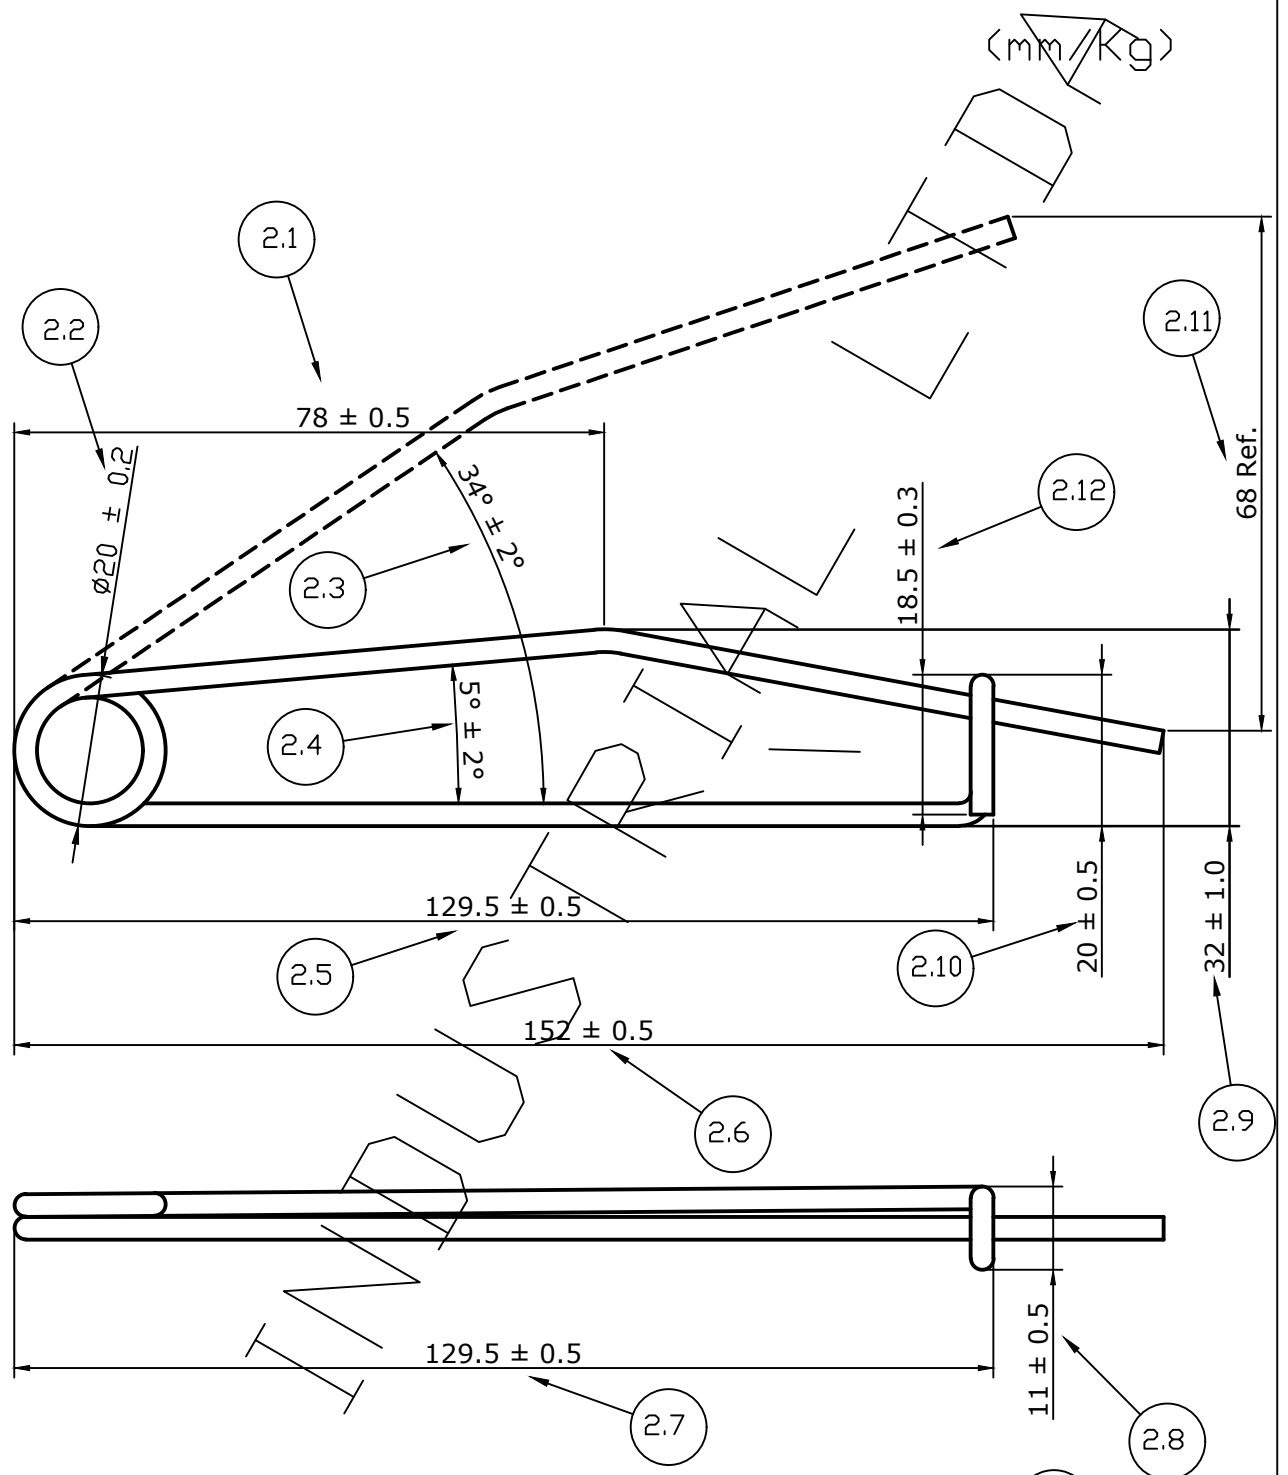

Material: DIN 17223 CB
 $\phi 3.0$

Tratamentos:
 Térmico: Revenir a $220 \pm$ X 20" Mín.

Superficial:
 Øleado